



中国认可
国际互认
检测
TESTING
CNAS L2291



Access to the World

TEST REPORT

Product Name : INVERTER CHARGER
Model Number : PS 1KVA, PS PLUS 1KVA

Prepared for : ShenZhen Sunray Power Co., Ltd
Address : B16,Rd No.1,The First Industrial Zone, Bai Hua Dong,
Guang Ming New District, Shen Zhen, China

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282



Report Number : ES200116061S



TEST REPORT IEC 61683 Photovoltaic systems – Power conditioners – Procedure for measuring efficiency	
Report Number.:	ES200116061S
Date of issue	March 27, 2020
Total number of pages.....	18 pages
Name of Testing Laboratory preparing the Report.....:	EMTEK (SHENZHEN) CO., LTD.
Applicant's name.....:	ShenZhen Sunray Power Co., Ltd
Address	B16,Rd No.1,The First Industrial Zone, Bai Hua Dong, Guang Ming New District, Shen Zhen, China
Test specification:	
Standard	IEC 61683:1999, EN 61683:2000
Test procedure	IEC/EN report
Non-standard test method	N/A
Test Report Form No.....:	IEC61683B
Test Report Form(s) Originator:	TÜV SÜD Product Service GmbH
Master TRF.....:	Dated 2017-11-03
Copyright © 2017 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed. This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

Test item description :	INVERTER CHARGER
Trade Mark :	
Manufacturer	ShenZhen Sunray Power Co., Ltd B16,Rd No.1,The First Industrial Zone, Bai Hua Dong, Guang Ming New District, Shen Zhen, China
Model/Type reference	PS 1KVA, PS PLUS 1KVA
Ratings	See rating label



Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
☒	CB Testing Laboratory:	EMTEK (SHENZHEN) CO., LTD.
Testing location/ address.....:		Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China
Tested by (name, function, signature).....:		James Dan / Engineer 
Approved by (name, function, signature)....:		William Guo / Manager 
		
☐	Testing procedure: CTF Stage 1:	
Testing location/ address.....:		
Tested by (name, function, signature).....:		
Approved by (name, function, signature)....:		
☐	Testing procedure: CTF Stage 2:	
Testing location/ address.....:		
Tested by (name + signature)		
Witnessed by (name, function, signature) .:		
Approved by (name, function, signature)....:		
☐	Testing procedure: CTF Stage 3:	
☐	Testing procedure: CTF Stage 4:	
Testing location/ address.....:		
Tested by (name, function, signature).....:		
Witnessed by (name, function, signature) .:		
Approved by (name, function, signature)....:		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment): - Photos (1 pages)	
Summary of testing: The product has been tested according to standard IEC 61683:1999 and EN 61683:2000.	
Tests performed (name of test and test clause): Efficiency measurement (4) No-load loss (7.1) Standby loss (7.2)	Testing location: EMTEK (SHENZHEN) CO., LTD. Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China
Summary of compliance with National Differences (List of countries addressed): N/A	

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

INVERTER CHARGER

Model Name: PS 1KVA

Color: Silver and Black

Operating Temperature Range: 0~55°C

Inverter Mode:

Rated Power: 1000VA/1000W

DC Input: 12VDC, 83A

AC Output: 230VAC, 50Hz, 4.3A, 1 ϕ

AC Charger Mode:

AC Input: 230VAC, 50Hz, 7.5A, 1 ϕ

DC Output: 13.5VDC, 10A/20A

AC Output: 230VAC, 50Hz, 4.3A, 1 ϕ

Solar Charger Mode:

Rated Current: 50A

System Voltage: 12VDC

Min. Solar Voltage: 9VDC

Max. Solar Voltage(VOC): 40VDC



MADE IN CHINA

INVERTER CHARGER

Model Name: PS PLUS 1KVA

Color: Silver and Black

Operating Temperature Range: 0~55°C

Inverter Mode:

Rated Power: 1000VA/1000W

DC Input: 12VDC, 83A

AC Output: 230VAC, 50Hz, 4.3A, 1 ϕ

AC Charger Mode:

AC Input: 230VAC, 50Hz, 7.5A, 1 ϕ

DC Output: 13.5VDC, 10A/20A

AC Output: 230VAC, 50Hz, 4.3A, 1 ϕ

Solar Charger Mode:

Rated Current: 50A

System Voltage: 12VDC

Min. Solar Voltage: 9VDC

Max. Solar Voltage(VOC): 40VDC





MADE IN CHINA

Test item particulars.....:	
Classification of installation and use.....:	☒ Class I ☐ Class II ☐ Class III ☐ Not classified
Supply Connection	☐ pluggable equipment ☐ direct plug-in ☒ permanent connection ☐ for building-in
Possible test case verdicts:	
- test case does not apply to the test object..... : N/A	
- test object does meet the requirement..... : P (Pass)	
- test object does not meet the requirement..... : F (Fail)	
Testing.....:	
Date of receipt of test item : March 01, 2020	
Date (s) of performance of tests : March 01, 2020 to March 09, 2020	
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a ☐ comma / ☒ point is used as the decimal separator.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60335-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	☐ Yes ☒ Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies) : Same as manufacturer	
General product information:	
The unit is stand-alone inverter with non- sine-wave o/p, it can convert the DC voltage to AC voltage. All models have the similar constructions, circuit diagram and PCB layout. Unless otherwise stated, all tests were performed on model PS PLUS 1KVA which means the typical model.	

IEC 61683:1999			
Clause	Requirement – Test	Measuring result – Remark	Verdict
4	Efficiency measurement conditions		P
	Efficiency is measured under the conditions in the following clauses.		P
	Specific conditions may be excluded by mutual agreement when those conditions are outside the manufacturer's allowable operating range.		P
4.1	DC power source for testing		P
	For power conditioners operating with fixed input voltage, the d.c. power source is a storage battery or constant voltage power source to maintain the input voltage.	DC power source used.	P
	For power conditioners that employ maximum power point tracking (MPPT) and shunt-type power conditioners, either a photovoltaic array or a photovoltaic array simulator is utilized.		N/A
4.2	Temperature		P
	All measurements are to be made at an ambient temperature of $25\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$.	(See appended table)	P
	Other ambient temperatures may be allowed by mutual agreement. However, the temperature used must be clearly stated in all documentation.		P
4.3	Output voltage and frequency		P
	The output voltage and frequency are maintained at the manufacturer's stated nominal values.		P
4.4	Input voltage		P
	Measurements performed in each of the following tests are repeated at three power conditioner input voltages: a) manufacturer's minimum rated input voltage; b) the inverter's nominal voltage or the average of its rated input range; c) 90 % of the inverter's maximum input voltage.		N/A
	In the case where a power conditioner is to be connected with a battery at its input terminals, only the nominal or rated input voltage may be applied.		P
4.5	Ripple and distortion		P
	Record input voltage and current ripple for each measurement. Also record output voltage and current distortion (if a.c.) or ripple (if d.c.). Ensure that these measurements remain within the manufacturer's specified values.		P
4.6	Resistive loads/utility grid		P

IEC 61683:1999			
Clause	Requirement – Test	Measuring result – Remark	Verdict
	At unity power factor, or at the intrinsic power factor of grid-connected inverters without power factor adjustment, measure the efficiency for power levels of 10 %, 25 %, 50 %, 75 %, 100 % and 120 % of the inverter's rating.		N/A
	Stand-alone inverters are also measured at a power level of 5 % of rated. The power conditioner test is conducted with a specified resistive and reactive grid impedance.	(See appended table)	P
4.7	Reactive loads	The unit did not support inductive load	N/A
	For stand-alone inverters, measure the efficiency with a load which provides a power factor equal to the manufacturer's specified minimum level (or 0,25, whichever is greater) and at power levels of 25 %, 50 % and 100 % of rated VA.		N/A
	Repeat for power factors of 0,5 and 0,75 (do not go below the manufacturer's specified minimum PF) and power levels of 25 %, 50 %, and 100 % of rated VA.		N/A
4.8	Resistive plus non-linear loads		P
	For stand-alone inverters, measure the efficiency with a fixed non-linear load (total harmonic distortion (THD) = $(80 \pm 5) \%$) equal to $(25 \pm 5) \%$ of the inverter's rated VA plus sufficient resistive load in parallel to achieve a total load of 25 %, 50 % and 100 % of rated VA.		P
	Repeat the measurements with a fixed non-linear load equivalent to $(50 \pm 5) \%$ of the inverter's rated VA plus sufficient resistive load in parallel to achieve a total load of 50% and 100% of rated VA.		P
	The type of non-linear load must be clearly stated in all documentation.	RCD non-linear load used	P
4.9	Complex loads	The unit did not support complex loads	N/A
	When a non-linear plus a sufficient reactive load condition is specified for stand-alone inverters, measure the efficiency with a fixed non-linear load (THD = $(80 \pm 5) \%$) equal to $(50 \pm 5) \%$ of the inverter's rated VA plus a sufficient reactive load (PF = 0,5) in parallel to achieve a total load of 50 % and 100 % of rated VA.		N/A
	The type of complex load is clearly stated in all documentation.		N/A

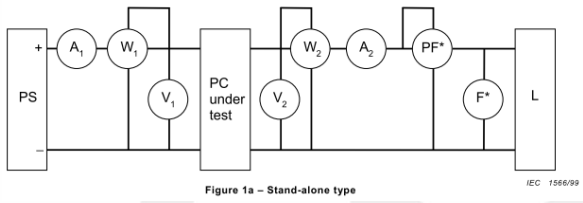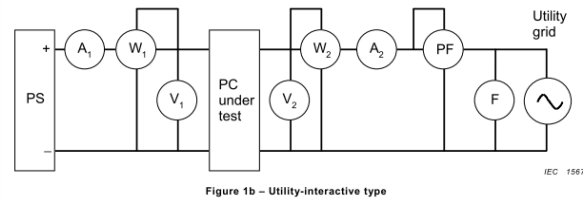IEC 61683:1999			
Clause	Requirement – Test	Measuring result – Remark	Verdict
5	Efficiency calculations		P
5.1	Rated output efficiency	(See appended table)	P
5.2	Partial output efficiency	(See appended table)	P
5.3	Energy efficiency	(See appended table)	P
5.4	Efficiency tolerances		P
6	Conditions of loading for output ports		P
6.1	Test circuit		P
	Figure 1a is applied to standard-alone power conditioners		P
	 Figure 1a – Stand-alone type IEC 1566/99		P
	Figure 1b is applied to utility-interactive power conditioners		N/A
	 Figure 1b – Utility-interactive type IEC 1567/99 PC power conditioner PS variable voltage-current d.c. power supply A₁ DC ammeter A₂ AC or d.c. ammeter W₁ DC wattmeter W₂ AC or d.c. wattmeter L load F frequency meter V₁ DC voltmeter V₂ AC or d.c. voltmeter PF power factor meter		N/A
6.2	Measurement procedure		P
7	Loss measurement		P
7.1	No-load loss	(See appended table)	P
7.2	Standby loss	(See appended table)	P
Annex A	Power conditioner description		P
Annex B	Power efficiency and conversion factor		P
Annex C	Weighted-average energy efficiency		P

IEC 61683:1999			
Clause	Requirement – Test	Measuring result – Remark	Verdict

Annex D	Derivation of efficiency tolerance in table 2		P
---------	---	--	---



TABLE	Efficiency recording and efficient calculation sheet								N/A	
power conditioner type	Grid-connected									
Model:										
Parameters of power conditioner	Minimum rated input voltage: Nominal voltage: Maximum input voltage: Rated output voltage: Rated output frequency: Rated output power:									
PV input voltage	a) Manufacturer's minimum rated input voltage									
Temperature (°C)										
Operating period for energy measurement (min)										
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%*	/	/	
Input voltage (V)	/							/	/	
Input voltage ripple (V)	/							/	/	
Input current (A)	/							/	/	
Input current ripple (A)	/							/	/	
Input power (Pi) (W)	/							/	/	
Output power (Po) (W)	/							/	/	
Output efficiency	/							/	/	
Input energy (Wi) (kWh)	/							/	/	
Output energy (Wo) (kWh)	/							/	/	
Energy efficiency	/							/	/	
PV input voltage	b) The inverter's nominal voltage									
Temperature (°C)										
Operating period for energy measurement (min)										
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%*	/	/	
Input voltage (V)	/							/	/	
Input voltage ripple (V)	/							/	/	

Input current (A)	/							/	/
Input current ripple (A)	/							/	/
Input power (Pi) (W)	/							/	/
Output power (Po) (W)	/							/	/
Output efficiency	/							/	/
Input energy (Wi) (kWh)	/							/	/
Output energy (Wo) (kWh)	/							/	/
Energy efficiency	/							/	/
PV input voltage	c) 90% of the inverter's maximum input voltage								
Temperature (°C)									
Operating period for energy measurement (min)									
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%*	/	/
Input voltage (V)	/							/	/
Input voltage ripple (V)	/							/	/
Input current (A)	/							/	/
Input current ripple (A)	/							/	/
Input power (Pi) (W)	/							/	/
Output power (Po) (W)	/							/	/
Output efficiency	/							/	/
Input energy (Wi) (kWh)	/							/	/
Output energy (Wo) (kWh)	/							/	/
Energy efficiency	/							/	/
Remark:									
*If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived;									

TABLE	Efficiency recording and efficient calculation sheet	P
power conditioner type	Stand-alone	
Model:	PS PLUS 1KVA	

Parameters of power conditioner	Minimum rated input voltage: N/A Nominal voltage: 12Vdc Maximum input voltage: N/A Rated output voltage: 230Vac Rated output frequency: 50Hz Rated output power: 1000W								
PV input voltage	a) Manufacturer's nominal voltage								
Temperature (°C)	25.2								
Operating period for energy measurement (min)	5min								
Resistive load									
Percentage of rated output VA	5%	10%	25%	50%	75%	100%	120%*	/	/
Input voltage (V)	24	24	24	24	24	24	/	/	/
Input voltage ripple (V)	0.16	0.22	0.31	0.44	0.56	0.68	/	/	/
Input current (A)	6.15	10.78	23.23	44.40	69.53	100.25	/	/	/
Input current ripple (A)	1.80	3.20	6.20	12.20	18.20	26.80	/	/	/
Input power (Pi) (W)	74.28	133.44	288.12	556.32	853.32	1207.56	/	/	/
Output power (Po) (W)	56.16	109.68	254.52	500.76	755.40	1031.04	/	/	/
Output efficiency	75.60%	82.19%	88.33%	90.01%	88.52%	85.38%	/	/	/
Input energy (Wi) (kWh)	6.19	11.12	24.01	46.36	71.11	100.63	/	/	/
Output energy (Wo) (kWh)	4.68	9.14	21.21	41.73	62.95	85.92	/	/	/
Energy efficiency	75.60%	82.19%	88.33%	90.01%	88.52%	85.38%	/	/	/
Reactive load									
PF	0.25 or minimum			0.50(>minimum)			0.75(>minimum)		
Percentage of rated output VA	25%	50%	100%	25%	50%	100%	25%	50%	100%
Input voltage (V)	/	/	/	/	/	/	/	/	/
Input voltage ripple (V)	/	/	/	/	/	/	/	/	/
Input current (A)	/	/	/	/	/	/	/	/	/
Input current ripple (A)	/	/	/	/	/	/	/	/	/
Input power (Pi) (W)	/	/	/	/	/	/	/	/	/
Output power (Po) (W)	/	/	/	/	/	/	/	/	/

Output efficiency	/	/	/	/	/	/	/	/	/
Input energy (Wi) (kWh)	/	/	/	/	/	/	/	/	/
Output energy (Wo) (kWh)	/	/	/	/	/	/	/	/	/
Energy efficiency	/	/	/	/	/	/	/	/	/
Non-linear load									
Non-linear load	25% of rated VA			50% of rated VA			/		
Percentage of rated output VA	25%	50%	100%	25%	50%	100%	/	/	/
Input voltage (V)	24	24	24	/	24	24	/	/	/
Input voltage ripple (V)	1.16	0.52	0.68	/	0.55	0.69	/	/	/
Input current (A)	23.82	45.61	97.55	/	45.61	97.55	/	/	/
Input current ripple (A)	15	19.8	34.1	/	45.63	97.57	/	/	/
Input power (Pi) (W)	282.0	569.76	1169.04	/	283.4	1168.74	/	/	/
Output power (Po) (W)	247.8	510.24	998.64	/	247.5	997.89	/	/	/
Output efficiency	87.87%	89.55%	85.42%	/	87.87%	85.42%	/	/	/
Input energy (Wi) (kWh)	23.50	47.48	97.42	/	47.49	97.41	/	/	/
Output energy (Wo) (kWh)	20.65	42.52	83.22	/	42.54	83.23	/	/	/
Energy efficiency	87.87%	89.55%	85.42%	/	89.57%	85.44%	/	/	/
Complex load									
Percentage of rated output VA	50%	100%	/	/	/	/	/	/	/
Input voltage (V)	/	/	/	/	/	/	/	/	/
Input voltage ripple (V)	/	/	/	/	/	/	/	/	/
Input current (A)	/	/	/	/	/	/	/	/	/
Input current ripple (A)	/	/	/	/	/	/	/	/	/
Input power (Pi) (W)	/	/	/	/	/	/	/	/	/
Output power (Po) (W)	/	/	/	/	/	/	/	/	/
Output efficiency	/	/	/	/	/	/	/	/	/
Input energy (Wi) (kWh)	/	/	/	/	/	/	/	/	/
Output energy (Wo) (kWh)	/	/	/	/	/	/	/	/	/
Energy efficiency	/	/	/	/	/	/	/	/	/

Remark:

*If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived;

TABLE	No load loss	P
power conditioner type	Stand-alone	
Measure input voltage (V)	11.88VDC	
Measured input power(W)	17.116W	
Remark: No load loss is measured when the power conditioner works at rated input voltage and it's load is disconnected.		

TABLE	Standby loss	P
power conditioner type	Stand-alone	
Measure input voltage (V)	12.034VDC	
Measured input power(W)	0.020961W	
Remark: Standby loss is measured when the power conditioner works at rated input voltage and in standby mode.		

Attachment - Photos

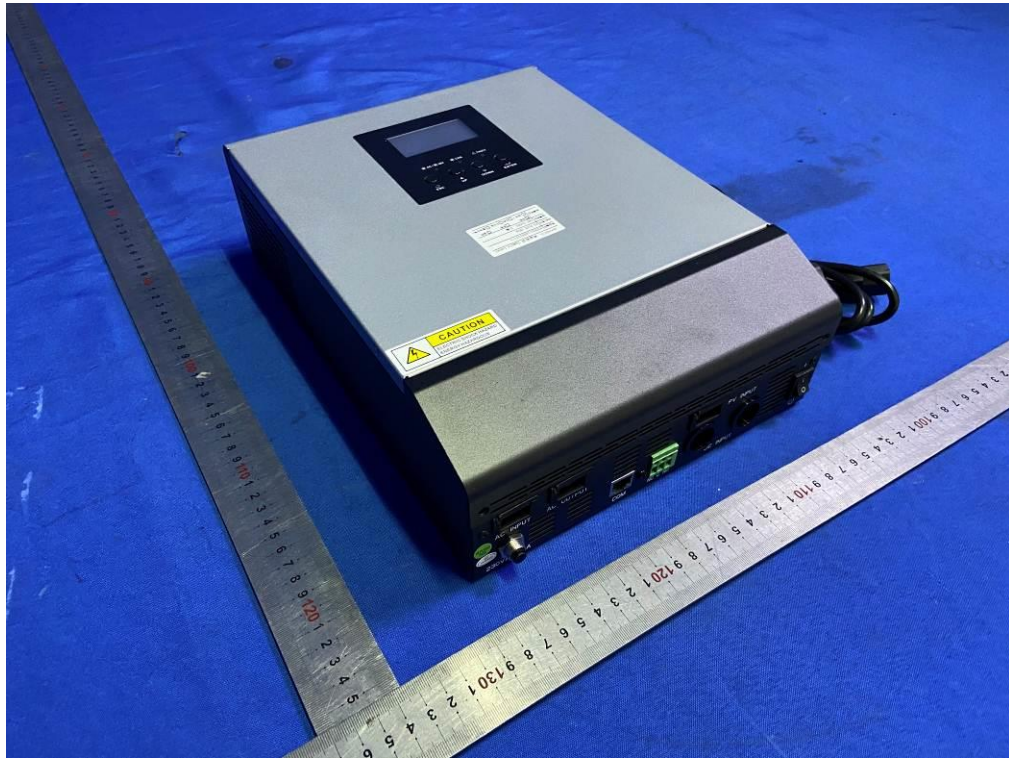


Fig. 1 Overview 1



Fig. 2 Overview 2

***** End of Report *****

声明 Statement

1. 本报告无授权批准人签字及“检验报告专用章”无效；

This report will be void without authorized signature or special seal for testing report.

2. 未经许可本报告不得部分复制；

This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责；

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用；

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外；

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检验报告若有异议，请于收到报告之日起 20 日内提出；

Objections shall be raised within 20 days from the date receiving the report.